



18 PCS 4 in 1 Waterproof PAR

User Manual

○ Precautions


- This product is suitable for indoor and outdoor use
- Lamps should be located in a dry and ventilated place to prevent moisture and rain from invading and causing short circuits.
- Do not block the ventilation holes to ensure good ventilation and heat dissipation, and the ambient temperature should not exceed 40 °C.
- The power supply voltage should be consistent with the rated voltage marked on the luminaire.
- Do not install in places that are easy to lose or vibrate.
- Do not install it near the heat source, so as not to increase the temperature of the lamp and damage the lamp.
- If the lamp needs to be repaired, please contact the local agent or manufacturer.

○ Technical parameter

- Voltage: AC100~240V, 50/60Hz;
- Power: 180W
- Light source: 18 PCS RGBW full-color lamp beads
- Light source life: 100,000 hours;
- Beam angle: 15 degrees/25 degrees;
- Dimming: 0~100%;
- Channel: 8CH;
- Control mode: Sound, master-slave, Auto;
- Shell material: aluminum alloy;
- Working temperature: -25°C ~+35°C;



○ Menu description

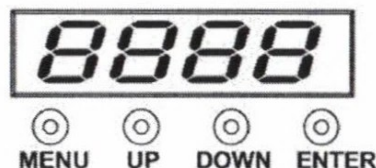

After power on, press the MENU key (MENU) to switch the menu, press the UP key (UP) or the DOWN key (DOWN) to select the setting value, after setting, press the ENTER key (ENTER) to save, the display flashes once to indicate that the data has been saved.

DMX512 Channel description:

- Channel 1.....Master Dimmer
- Channel 2.....Red dimmer dimming, linear dimming from dark to bright
- Channel 3Green dimmer dimming, linear dimming from dark to bright
- Channel 4Blue dimmer dimming, linear dimming from dark to bright
- Channel 5.....White Dimmer Dimming, Linear Dimming from Dark to Bright
- Channel 6Total strobe R, G, B, W total strobe, slow to fast
- Channel 7 Macro function selection 0-50: DMX eight-channel control; 51-100: jump; 101-150: fade; 151-200: voice-activated jump; 201-255: voice-activated
- Channel 8.....Function Speed Function Speed Slow to Fast

