


200W Zoom COB

(White & warm color)

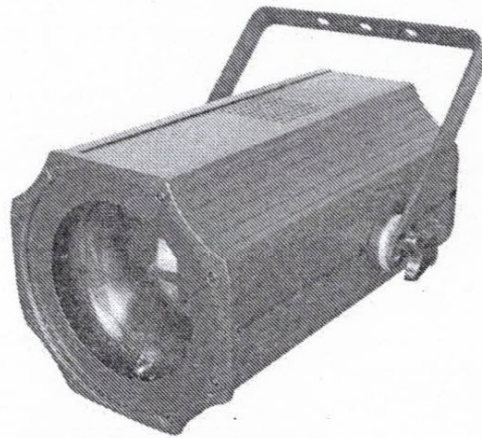

(Model:RG-245)

USER MANUAL

Please read the instruction manual carefully before use

1. Technical parameters:

Input Power: AC90 ~ 240V 50/60Hz

Light source:200W (Warm & white) COB beads,

Color Temperature 3200k-5600k adjustment

DMX Channel: 8 CH

Control mode: Sound, Auto ,master-slave and DMX 512

Protection level:IP60

2. Menu display

No.	Display	Function Introduction
1	A001-A512	DMX512 address code setting
2	Au01-Au03	LED color selection
3	FF00-FF99	LED color jump
4	EE00-EE99	LED color gradient
5	CC00-CC99	LED color pulse variation
6	F000-F255	Strobe setting, LED fully lit
7	SOUD	Sound controlled strobe, voice controlled focal length
8	SUND	Sound controlled color change, voice controlled focal length
9	Y000-Y255	Warm white brightness setting adjustment
10	W000-W255	Cold white brightness setting adjustment
11	P000-P255	Motor focusing
12	REST	Motor reset

3. Channel description

CH	Value	Function Introduction
CH1	0-255	Total dimming
CH2	0-255	Warm white dimming
CH3	0-255	Cold white dimming
CH4	0-9	Flashing off
	10-255	Flashing on, speed increases from slow to fast
CH5	0-50	Dimming mode, controlled by CH1~CH7
	51-100	Color selection mode, choose different colors
	101-150	Jump mode, automatically adjust focal length
	151-200	Gradient mode, automatically adjust focal length
	201-250	Pulse mode, automatically adjust focal length
	251-255	Sound controlled color change, sound controlled focal length
CH6	0-255	Control the speed of jumps, gradients, and pulsations, from slow to fast
CH7	0-255	Motor focusing, aperture from large to small
CH8	0-250	CH1~CH7 are effective
	251-255	The motor reaches its maximum position, the light is turned off, and the motor resets for 5 seconds